HP recommends
Windows Vista® Business

Microtower

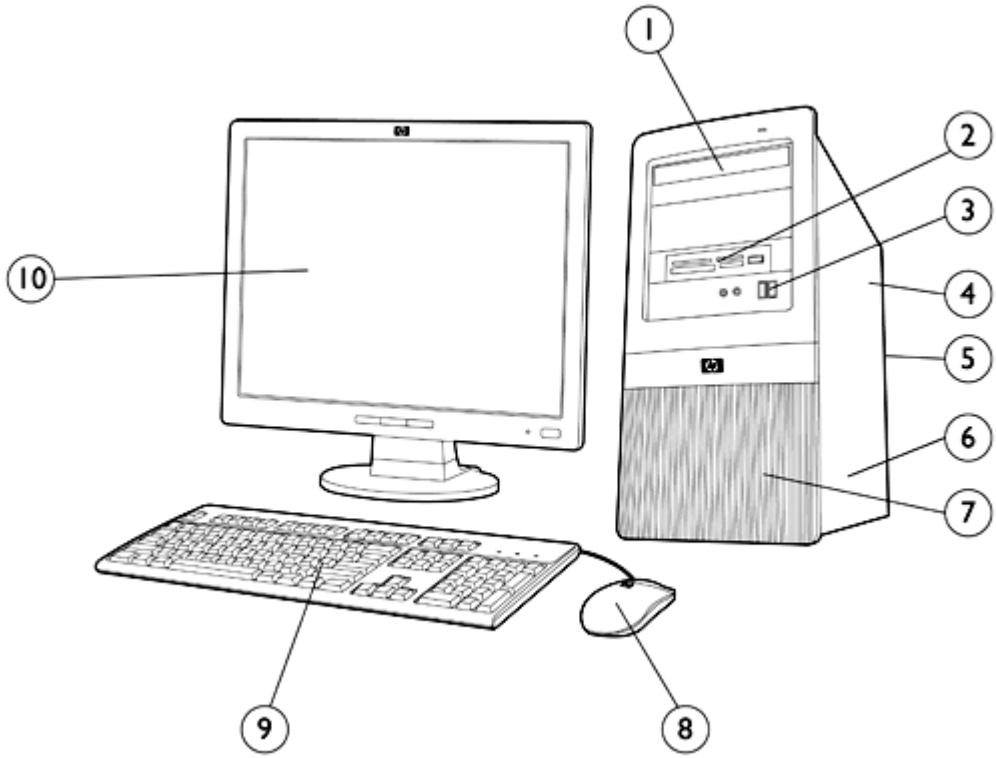

1. (2) external 5.25″ drive bays for optional optical drives
2. (1) external 3.5″ drive bay for optional media reader or diskette drive
3. (2) USB 2.0 ports, audio ports
4. 300-watt max power supply
5. (4) USB 2.0 ports, (2) PS/2, (1) RJ-45, (1) VGA, (1) audio in – (1) audio out – (1) MIC
6. (1) full-height PCI 2.3 slot, (2) PCIe x1 slots, (1) PCIe x16 slot
7. (2) internal 3.5″ drive bays
8. PS/2 Scroll Mouse
9. HP Standard Keyboard
10. Monitor (sold separately)

Overview

At A Glance

- AMD Phenom™ Quad and Triple Core processors, AMD Athlon™ 64 X2 Dual Core processors, AMD Athlon 64 processors, and AMD Sempron™ processors
- Choice of operating systems:
  - Genuine Windows Vista Business 32
  - Genuine Windows Vista Home Basic 32
  - Genuine Windows Vista Ultimate 32 (English Only)
  - Genuine Windows Vista Business downgrade to Genuine Windows XP Professional installed
  - FreeDOS
- NVIDIA nForce 430 Chipset
- PCI and PCI Express I/O buses
- Serial ATA controller
- USB 2.0 support
- NVIDIA Integrated MAC and Realtek 8211B Gigabit Ethernet
- Choice of hard drives and optical drives
- DDR2 SDRAM system memory
- Protected by HP Services. Terms and conditions vary by country. Certain restrictions and exclusions apply.

Standard Features and Configurable Components

Processor and Speed One of the following	**AMD Sempron Processors with HyperTransport™ Technology:** AMD Sempron LE-1200 Processor (2.1-GHz, 512K L2 cache, HT bus 1.0) AMD Sempron LE-1250 Processor (2.2-GHz, 512K L2 cache, HT bus 1.0) AMD Sempron LE-1300 Processor (2.3-GHz, 512K L2 cache, HT bus 1.0) **AMD Athlon Single-Core Processors with HyperTransport Technology:** AMD Athlon LE-1640B Processor (2.7-GHz, 512K L2 cache, HT bus 2.0) **AMD Athlon Dual-Core Processors with HyperTransport Technology:** AMD Athlon X2 4450B Processor (2.3-GHz, 1MB L2 cache, HT bus 2.0) AMD Athlon X2 5000B Processor (2.6-GHz, 1MB L2 cache, HT bus 2.0) AMD Athlon X2 5200B Processor (2.7-GHz, 1MB L2 cache, HT bus 2.0) AMD Athlon X2 5400B Processor (2.8-GHz, 1MB L2 cache, HT bus 2.0) **AMD Phenom Triple-Core Processors with HyperTransport Technology:** AMD Phenom X3 8600B Processor (2.3-GHz, 1.5 MB Dedicated L2 cache, 2 MB Shared L3 cache, HT bus 3.0) **AMD Phenom Quad-Core Processors with HyperTransport Technology:** AMD Phenom X4 9500 Processor (2.2-GHz, 2 MB Dedicated L2 cache, 2 MB Shared L3 cache, HT bus 3.0) AMD Phenom X4 9600B Processor (2.3-GHz, 2 MB Dedicated L2 cache, 2 MB Shared L3 cache, HT bus 3.0)
Operating Systems and Application Software (availability varies by region)	Genuine Windows Vista Ultimate 32 (English Only) * Genuine Windows Vista Business 32* Genuine Windows Vista Home Basic 32* Genuine Windows Vista Business downgrade to Genuine Windows XP Professional installed*† Free DOS * Certain Windows Vista product features require advanced or additional hardware. See: http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx and: http://www.microsoft.com/windowsvista/getready/capable.mspx for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor. † Windows Vista Business disk also included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order annually at least 25 customer systems with the same custom image. Microsoft Office 2007 Basic Microsoft Office 2007 Small Business Microsoft Office 2007 Professional Microsoft Works 8.5 Roxio Easy Media Creator 9.x** Intervideo WinDVD Player 5.x** Symantec AntiVirus 10 Sun Java Runtime Environment AOL Toolbar

Standard Features and Configurable Components

** Supporting software available with certain optical drive configurations

Hard Drives	80-GB Serial ATA 3.0-Gb/s NCQ, Smart IV (7200 rpm) 160-GB Serial ATA 3.0-Gb/s NCQ, Smart IV (7200 rpm) 250-GB Serial ATA 3.0-Gb/s NCQ, Smart IV (7200 rpm) 500-GB Serial ATA 3.0-Gb/s NCQ, Smart IV (7200 rpm)
System Memory	512-MB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (1 x 512MB) 1-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (1 x 1GB) 2-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (2 x 1GB) 2-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (1 x 2GB) 3-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (3 x 1GB) 4-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (4 x 1GB) 4-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (2 x 2GB)
Storage – One or more of the following (see Storage section below)	Diskette Drive 1.44-MB Diskette Drive Media Reader HP 16-in-1 Media Reader and additional USB 2.0 port Optical Drives (Serial ATA) SATA DVD-ROM Drive SATA CD-RW/DVD-ROM Combo Drive SATA SuperMulti LightScribe DVD Writer Drive
Input Devices	Keyboard – One of the following HP PS/2 Standard Keyboard HP USB Standard Keyboard Mouse – One of the following PS/2 2-Button Optical Scroll Mouse USB 2-Button Optical Scroll Mouse USB 2-Button Laser Mouse
Audio	Realtek ALC888S High Definition audio codec 3D audio compliant and HD Audio compatible Internal PC speaker

Standard Features and Configurable Components

Communication	Integrated Realtek RTL8211B Gigabit Ethernet Controller Intel PRO/1000 PT Gigabit PCIe Controller (full height) - optional Agere 56K PCI Modem - optional HP Wireless A+G PCI Card (full height)
Graphics	NVIDIA GeForce 6150SE Graphics – integrated NVIDIA GeForce 8400 GS (256MB) Single Head PCIe x16 – optional* ATI Radeon HD 2400XT (256MB DH) PCIe x16 – optional * 1GB of system memory required. Graphics cards use part of the total system memory to enhance graphics performance.
Miscellaneous	HP FireWire / IEEE 1394 PCI Card (full height) HP Serial/Parallel PCI Card (full height)

System Details

Base Unit

- Micro ATX microtower chassis, including power supply and front bezel
- Five (5) drive bays and four expansion slots
- Microsoft operating system CD – optional
- Active type heatsink
- 92 x 92 x 25 mm chassis fan
- System board NVIDIA MCP61P, Realtek RTL8211B GbE Ethernet PHY, and Realtek ALC888S audio, (1) full-height PCI 2.3 slot, (2) PCI Express x1 slots, (1) PCI Express x16 slot, (4) DDR2 DIMM memory slots, (4) Serial ATA data connectors
- Product documentation on CD
- HP system restore CD – optional
- Power cord

Slots

PCI	One (1) full-height PCI 2.3 slot on PCA Two (2) full-height PCI Express x1 slots on PCA One (1) full-height PCI Express x16 slot on PCA (for graphic cards)
Memory Expansion	Four (4) DDR2 SDRAM DIMM slots (4 GB maximum memory support)

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Bays

Internal	Two (2) 3.5″
External	Two (2) 5.25″ One (1) 3.5″

USB Support

EHCI high-speed USB 2.0 controller

Two (2) front ports; Four (4) rear ports, Two (2) internal ports on motherboard

Interfaces (Legacy)

One (1) PS/2 keyboard port

One (1) PS/2 mouse port

One (1) analog VGA video port

One (1) line in; one (1) line out; one (1) mic in

One (1) RJ45 network port

Weight & Dimensions

Chassis Dimensions (H x W x D)	14.38 x 6.50 (7.09 w/bezel) x 14.69 in 365 x 165 (180 w/bezel) x 373 mm
Packaged Dimensions (L x W x H)	19.13 x 21.875 x 10.13 in 490 x 556 x 257 mm
System Weight	22.4 lb (10.2 kg)
Shipping Weight	30.8 lb (14.0 kg)

System Details

Technology and Features	Memory Type	PC2-6400 DDR2 SDRAM (800MHz) non-ECC Up to 4-GB maximum system memory supported
	NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.	
	Hard Drive Interfaces Supported	Serial ATA
Chassis	Front Panel	Power button Power On LED HDD Activity LED
	Cooling Solutions Supported	Power Supply Fan (variable speed) Active heatsink (variable speed) Chassis fan
	Slots Supported	Four (4) full-height expansion slots
	Front I/O	Two (2) USB 2.0 ports
	Rear I/O	Standard Micro ATX I/O connectors, including four (4) USB 2.0 ports
	Drive Bays	Two (2) 5-1/4" external One (1) 3-1/2" external Two (2) 3-1/2" internal
	Internal Speaker	Standard
	Security	Padlock loop Kensington Lock Support
	Power Supply	300-watt ATX Power Supply – PFC/non-PFC with a 115v/230v line switch (varies by country/region)

Unit Environment and Operating Conditions

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 4 in (10.2 cm) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range	Operating	50° to 95° F (10° to 35° C)
	Non-operating	-22° to 140° F (-30° to 60° C)
Relative Humidity	Operating	10% to 90% (non-condensing at ambient)
	Non-operating	5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating	10,000 ft (3048 m)
	Non-operating	30,000 ft (9000 m)

NOTE:Operating temperature is de-rated 1.0 deg C per 1000 ft (300 m) to 10,000 ft (3000 m) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

System Board	Processor	Socket AM2 and AM2+ Support AMD Sempron, Athlon 64, Athlon 64 X2, Phenom 3C or Phenom 4C
	PWM	ST L6740 – 3 phase
	Chipset	NVIDIA nForce 430
	Super I/O	ASUS F8000
	Front Side Bus Frequency	HT2, 1GHz x 16 up and down links
	Memory	DDR2 SDRAM 4 x DIMM slots
	Clock Generator	Integrated in chipset
	Integrated Graphics	NVIDIA GeForce 6150SE
	Audio	Realtek ALC888S HD Audio compatible codec with two channel audio 3D audio
	LOM	Integrated NVIDIA MAC and Realtek RTL8211B Gigabit Ethernet
	Storage	Four Serial ATA interfaces
	Expansion Slots	1 x PCI 2.3 slot 2 x PCI Express x1 slots 1 x PCI Express x16 slot
	BIOS	SPI EEPROM
	Industrial Standard	PCI 2.3 compliant USB 2.0
	Rear Side I/O Ports	1 x PS/2 keyboard port 1 x PS/2 mouse port 4 x USB 2.0 ports 1 x RJ-45 10/100/1000 port 1 x D-sub 15 pin analog VGA port 3 x audio ports
	On Board I/O Interfaces	1 x ATX power connector 1 x +12V power connector 1 x Floppy connector 1 x Front panel connector, Switch, LED (ON/Flash/OFF) 2 x Fan headers for CPU, chassis, with voltage/fan speed control 1 x header to support 2 USB 2.0 ports at front side 1 x header to support 2 front (Headphone/Mic) audio ports 1 x header to support USB media reader
	Board Size	Micro-ATX, PCB Size: 9.6 x 9.0 in (24.38 x 22.86 cm 4-layer PCB with green color
	Additional Features	Bootable without keyboard, mouse or monitor Keyboard/mouse/USB wake up Support S1, S3, S4 and S5 ACPI status Hardware monitor capability CPU fan speed control

Network Interface	**Integrated Realtek 8211B Gigabit Ethernet Controller**	**Hardware Highlights**	PCIe x1 interface
		Features	10-Mbps, 100-Mbps and 1000-Mbps operation Crossover detection and auto-correction Wake-on-Lan and remote Wake-up
	Intel PRO/1000 PT Gigabit PCIe Adapter	**Hardware Highlights**	PCI Express interface
		Features	10-Mbps, 100-Mbps and 1000-Mbps operation

Wireless

Wireless A+G PCI Card (full height bracket)

Power Supply

- ATX Power Supply – Passive PFC/non-PFC with a 115v/230v line switch
- Passive Power Factor Correction (PFC) – with line switch set to 230V – No PFC in 115V line switch position
- 90 to 140VAC, or 180 to 264VAC operating voltage range
- 100 to 127VAC, or 200 to 240VAC rated voltage range
- 50-60 Hz rated line frequency
- 47-63 Hz operating line frequency range
- 300 watt maximum rated power
- 80-mm power supply fan – variable speed for optimum acoustics

Power Conservation 'Energy Saver'

- APM 1.2 support
- Screen blanking
- Hard drive 'Idle' mode
- System Idle mode
- ~2 watt power consumption in ES mode – suspend to RAM (S3) (instantly available PC)
- Processor/Cache memory power-down (S3)

System Environmental Specs

- Values are subject to change without notification and are for reference only.
- Performance of system, options, and ancillary equipment will vary depending on the system configuration.
- Levels presented do not account for non-HP/Compaq installed hardware.

Ambient Air Temperature	**Operating**	50° to 95°F (10° to 35°C) at sea level with an altitude de-rating of 1.0°C per every 1000 ft (300 m) above sea level to a maximum of 8000 ft (2500 m), no direct sustained sunlight. Maximum rate of change is 77°F/Hr (25°C/Hr). The upper limit may be limited by the type and number of options installed.
	Storage	-22° to 140°F (-30° to 60°C) – Maximum rate of change: 410°F/Hr (210°C/Hr).
Humidity	**Operating**	10% to 90% relative humidity (Rh), 86°F (30°C) maximum wet bulb temperature, non-condensing
	Storage	10% to 95% relative humidity (Rh), 101.66°F (38.7°C) maximum wet bulb temperature, non-condensing

System Details

Altitude	Operating	0 to 10,000 feet (0 to 3048 meters) – This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 1,000 ft/min (304.8 m/min).
	Non-Operating	0 to 30,000 feet (0 to 9,144 meters) – Maximum allowable altitude change rate is 1200 ft/min (365.76 m/min).
Shock	Listed are the levels of shock the product can withstand with NO damage being incurred. The values represent peak input acceleration during a 2 to 3 ms half-sine shock pulse, 11 ms trapezoidal shock pulse.	
	Non-Operating	35G's (Half-sine Shock) 35G's (Trapezoidal Shock)
Vibration	Listed are the levels of vibration the product can withstand with NO damage being incurred. The values represent a flat random vibration input acceleration profile across the given frequency range.	
	Operating	Random vibration at 5Hz@0.00025G^2/Hz, 10Hz@0.01G^2/Hz, 100Hz@0.01G^2/Hz, 300Hz@0.00001G^2/Hz 5Hz to 300Hz, (0.25G's nominal).
	Non-Operating	Random vibration at 0.008G^2/Hz, 10Hz to 500Hz, (2 Grms nominal).
Acoustic Noise	Listed are the declared A-WEIGHTED SOUND POWER LEVELS (LWAd) and declared average desktop seated operator position A-WEIGHTED SOUND PRESSURE LEVELS (LpAm) when the product is operating in a 73.4°F (23°C) ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).	
	IDLE (Fixed disk drive spinning)	LWAd = 4.3 Bels, Desktop Average LpAm = 32 dBA
	FIXED DISK (Random write)	LWAd = 4.8 Bels, Desktop Average LpAm = 37dBA
	CD-ROM (Sequential Reads)	LWAd = 5.0 Bels, Deskside Average LpAm = 39dBA

Service and Support

On-site Warranty[Note 1]: One-year (1-1-1) limited warranty delivers one year of on-site, next business-day[Note 2] service for parts and labor and includes free telephone support[Note 3] 24 x 7. Global coverage[Note 2] ensures that any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. One-year onsite and labor are not available in all countries.

NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region

NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

NOTE 3: Technical telephone support applies only to HP-configured Compaq and third-party HP-qualified hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

After-Market Options

Communication	**NICs**	
	Intel PRO/1000 PT Gigabit PCIe Controller (full height)	EH352AA
	Wireless LAN	
	HP Wireless A+G PCI Card (North America only)	EA118AA
	HP Wireless A+G PCI Card (WW except North America)	PZ928AA
	Modems	
	Agere 2006 PCI High-Speed 56K International SoftModem	EK694AA
Hard Disk Drives	HP 500-GB SATA 3.0-Gb/s Hard Drive	PV943A
	HP 250-GB SATA 3.0-Gb/s Hard Drive	PY278AA
	HP 160-GB SATA 3.0-Gb/s Hard Drive	PY277AA
	HP 80-GB SATA 3.0-Gb/s Hard Drive	PY276AA
Removable Storage Devices	**Diskette Drive**	
	HP 1.44-MB Internal Diskette Drive	AG295AA
	HP 1.44-MB USB Diskette Drive – External	DC141B
	16-in-1 Media Reader	EM718AA
Input Devices	**Keyboards**	
	HP PS/2 Standard Keyboard	DT527A
	HP USB Standard Keyboard	DT528A
	Mice	
	HP USB 2-Button Laser Mouse	GW405AA
	HP PS/2 2-Button Optical Scroll Mouse	EY703AA
	HP USB 2-Button Optical Scroll Mouse	DC172B
Memory	HP 2-GB PC2-6400 (DDR2-800 MHz) DIMM	AH060AA
	HP 1-GB PC2-6400 (DDR2-800 MHz) DIMM	AH058AA
	HP 512-MB PC2-6400 (DDR2-800 MHz) DIMM	AH056AA
Audio	HP Satellite Speakers	ZD929AA
Graphics	NVIDIA GeForce 8400 GS 256MB SH PCIe x16 Graphics Card*	GJ119AA
	ATI Radeon HD 2400 XT 256MB DH PCIe x16 Graphics Card	KD060AA
	* 1GB of system memory required. Graphics cards use part of the total system memory to enhance graphics performance.	

After-Market Options

Optical Drives	HP SATA CD-RW/DVD-ROM Combo Drive	AH046AA
	HP SATA DVD-ROM Drive	AH047AA
	HP SATA SuperMulti LightScribe DVD Writer Drive	GF343AA
Security	HP Business PC Security Lock Kit	PV606AA
Miscellaneous Accessories	HP FireWire / IEEE 1394 PCI Card	PA997A
Monitors*	**CRTs**	
	HP s7540 17" (16.0" vis) CRT Monitor	PF997AA#XXX
	HP v7650 17" (16.0" vis) Flat-face CRT Monitor	PF996AA#XXX
	TFTs	
	HP L1506 15" TFT Flat Panel Monitor – Analog only	PX848AA#XXX
	HP L1706 17" TFT Flat Panel Monitor – Analog only	PX849AA#XXX
	HP L1740 17" TFT Flat Panel Display – Analog/Digital	PL766AA#XXX
	HP L1755 17" TFT Flat Panel Display – Analog/Digital	PL777AA#XXX
	HP L1906 19" TFT Flat Panel Display – Analog only	PX850AA#XXX
	HP L1940T 19" TFT Flat Panel Display – Analog/Digital	EM869AA#XXX
	HP L1955 19" TFT Flat Panel Display – Analog/Digital	PD974AA#XXX
	HP L2065 20" TFT Flat Panel Display – Analog/Digital	EF227A4#XXX
	HP LP2465 24" TFT Widescreen Flat Panel Display – Analog/Digital	EF224A4#XXX
	GSA Monitors	
	HP L717g 17" GSA Flat Panel Monitor	EE191AA#XXX
	HP L919g 19" GSA Flat Panel Monitor	EE192AA#XXX
	Options	
	HP Flat Panel Speaker Bar	EE418AA
	HP CRT Monitor Multimedia Base	PM552AA

*This is only representative, not an exhaustive list.

Memory

DDR SYNCH DRAM NON-ECC MEMORY

Non-ECC DDR2 memory up to PC2-6400 (800-MHz). Memory upgrades are accomplished by adding single or multiple DIMMs of the same or varied sizes. This chart does not represent all possible memory configurations.

CAUTION: You must shut down the computer **and disconnect the power cord** before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

HP recommends dual-channel symmetric configurations for maximum performance.
For best performance, add the same amount of total memory to each channel and do not mix speeds. For dual-channel symmetric performance, the total amount of memory in each channel must be equal. If speeds are mixed, speed will default to the slowest DIMM.

STANDARD MEMORY

512-MB, 1-GB, 2-GB, or 4-GB DDR2 SYNCH DRAM

OPTIONAL MEMORY UPGRADES

Supports up to 4-GB of DDR2 SYNCH DRAM. Not all memory configurations possible are represented below.

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

	Channel A	Channel B	Channel A	Channel B
DIMM Size	Slot 1	Slot 2	Slot 3	Slot 4
512-MB	512-MB			
1-GB	1-GB			
2-GB (dual-channel symmetric)	1-GB	1-GB		
4-GB (dual-channel symmetric)	1-GB	1-GB	1-GB	1-GB
4-GB (dual-channel symmetric)	2-GB	2-GB		

Storage

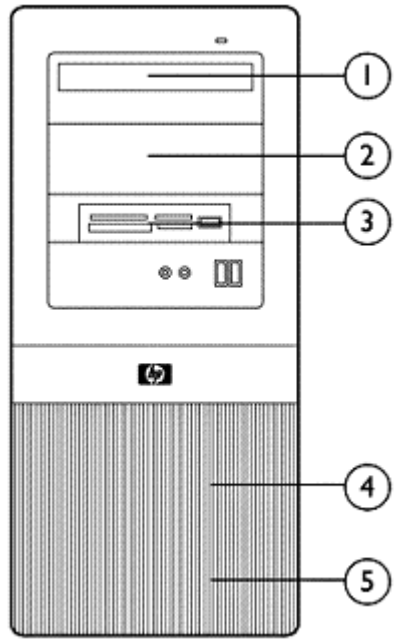

HP Compaq dx2450 Microtower Business PC

	Maximum Quantity Supported	Position Supported	Controller
Drive Support			
Diskette Drives	1	3	SIO
Media Reader	1	3	Internal USB 2.0 port
DVD-ROM Drives	2	1, 2	SATA
CD-RW/Combo Drives	2	1, 2	SATA
SuperMulti LightScribe DVD Writer Drives	2	1, 2	SATA
3.5″ Serial ATA Hard Drives	2	4,5	SATA

Technical Specifications - Audio

Integrated Realtek ALC888S Audio	Type	Integrated
	HD Audio compatible codec	Yes
	Sampling	Supports 48/96 KHz
	Audio Jacks	Mic-In
		Line-In
		Line-Out / Headphone Out
	Power Support	Digital: 3.3V
		Analog: 5V
	Other	Meets performance requirements for audio on PC99/2001 systems High-performance DACs with 97dB SNR(A-Weighting) ADCs with 90dB NR(A-Weighting)

Integrated Realtek 8211B GbE Ethernet Controller	Controller	8211B-GR
	Memory	N/A
	Data rates supported	1 GHz data rate with X1 link width
	Compliance	IEEE802.3, IEEE 802.3u, IEEE 802.3ab
	Bus architecture	PCIexpress 1.1
	Data transfer mode	Hal/Full Duplex Operation
	Hardware certifications	MS NDIS5, NDIS6, IPv4, IPv6, TCP, UDP
	Power requirement	1000 Base-T : 761.4 mW 100 Base-T: 270 mW 10 Base-T: 324.6 mW Power Savings: W link: 135 mW Link Down: 345 mW S3: 288.6 mW
	Boot ROM support	Yes, EEPROM, 1Kb, 2Kb
	Network transfer rate	10/100/1000Mbps over CAT.5 10Mbps over CAT.3 RGMII (1000Mbps) MII (100Mbps) MII (10MBps)
	Dimensions	9mm x 9mm
	Management capabilities	ACPI rev 2.0, PM rev 1.1, ASPM v1.0a

Intel PRO/1000 PT Gigabit PCIe Controller	Connector	RJ-45	
	Controller	Intel 82572EI Gigabit Ethernet Controller	
	Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers	
	Data rates supported	10/100/1000 Mbps	
	Compliance	IEEE 802.1P, 802,1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control	
	Bus architecture	PCI Express 1.0a	
	Data transfer mode	Bus-master DMA	
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union	
	Power requirement	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T	
	Boot ROM support	Yes	
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps	
		10BASE-T (full-duplex) 20 Mbps	
		100BASE-TX (half-duplex) 100 Mbps	
		100BASE-TX (full-duplex) 200 Mbps	
		1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)	
	Environmental	Operating temperature	32° to 131°F (0° to 55° C)
		Operating humidity	85% at 131° F (55° C)
	Dimensions	6.4 x 2.6 x 0.8 in (16.3 x 6.6 x 1.9 cm)	

	Management capabilities	ASF, WOL, PXE, DMI, WFM 2.0.
HP Wireless A+G PCI	Dimensions	4.99 x 2.54 x 0.71 in (126.8 x 64.4 x 18.0 mm)
	Weight	0.268 lb (65 g)
	Controller system interface	Atheros AR5414X chipset PCI Spec 2.2
	Network standard	IEEE 802.11a/b/g
	Frequency band	5.1500 to 5.8500 GHz 2.4000 to 2.4835 GHz 2.4465 to 2.4835 GHz (Europe, Middle East, Asia and Asia Pacific – excluding Japan) 2.4000 to 2.4697 GHz (Japan)
	Operating Temperature	32° to 140° F (0° to 60° C), operating
	Storage temperature	-4° to 176° F (-20° to 80° C), non-operating
	Humidity	10% to 85% non-condensing
	Operating voltage	5V ± 5%
	Power consumption	Tx/Rx peak 560/250mA @ 3.3V (max.)
	Output power (approximately)	15 dBM ±2dB
	Receive sensitivity	-90dBm at 11 Mbps (typical)
	Data transfer rate	Standard rates of 1, 2, 5.5, 11, 6, 9, 12, 18, 24, 48, 54 and Super AG Mode108-Mbps
	Spreading	DSSS (Direct Sequence Spread Spectrum)
	Security	64(40h) bit, 128(104h) bit, WPA, IEEE802.1X, AES-OCB, AES-CCM, Microsoft PEAP,TKIP, WEP
	Antenna	External 5dBi antenna
	Throughput	108 Mbps (only with Belkin 54G or above router that supports 108 Mbps speed) – 200 ft (60.96 m) – Indoor 54 Mbps – 200 ft (60.96 m) – Indoor 11 Mbps – 200 ft (60.96 m) – Indoor
	Certifications	Wi-Fi certified
	Certifications for use by country	North America: United States, Canada Europe: Austria, Belgium, Cyprus, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Liechtenstein, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland, United Kingdom Australia, New Zealand

Technical Specifications - Communications

Agere 56K PCI Modem	Data Transmission	56,000 Kbps maximum downstream data NOTE: 56 Kbps technology refers to download speeds only and requires compatible modems at server sites. Other conditions may limit modem speed. FCC limitations allow a maximum of 53 Kbps during download transmissions.
	Data Speeds	(Upload only) 33,600/31,200/28,800/26,400/21,600/19,200/16,800/14,400/12,000/9,600/7,200/4,800/2,400/1,200/300
	Data Standards	ITU-T V.90, ITU-T, ITU-T V.34, V.44, V.42, V.42bis21, V.32bis, Bell 212A, and Bell 103
	Fax Speeds	14,400/12,000/9,600/7,200/4,800/2,400/300 b/s
	Fax Mode Capabilities	ITU-T T.31 class 1 FAX, V. 17, V.29, V.27ter, and V.21 Channel 2
	Error Correction and Data Compression	V.44, 42bis, V.42 and MNP2-5
	Power Management	ACPI; PPMI 1.1 and wake support with PME and Vaux; meets PCI 2.3 requirements and PC 2001 requirements
	Upgradeability	Driver upgradeable for future enhancements
	Video	ITU-T V.80 video ready interface
	Other	TIA/EIA 602 standard AT command set Integrated DTE interface with speeds of up to 115.2 Kbps, parallel 16550a UART-compatible interface Optional ring wakeup signal
	Operating Temperature	32° to 158° F (0° to 70° C)
	Operating Humidity	20% to 90%, non-condensing
	Power	Requires a 3.3-V auxiliary power rail on PCI bus Uses only one PCI load (i.e., one grant/request pair), one shared IRQ, one electrical load
	Chipset	Agere Systems SV92PL – Integrated PCI interface with 5-V tolerant buffers and CardBus support
	Dimensions (L X H)	Complies with PCI low profile specifications-6.7 x 2.3 in (17.0 x 5.8 cm) and supports high- and low-profile brackets
	Connection	Single RJ-11 connector
	Other Features	Digital line protection, call progress monitoring via on-board piezo device, support for high profile and low profile brackets, PnP ID support
	Safety	UL recognized to UL 1950, 3rd edition (U.S. and Canada); IEC 950 (TUV, NEMKO, DEMKO, SEMKO); CE Mark, EC 950 (TUV, NEMKO, DEMKO, SEMKO, CE mark
	EMC	FCC Part 15, IC ES003, EN 55022, 3rd edition, EN 55024, annex A, EN 61000-4-6, EN 61000-4-8
	Telecom	FCC Part 68, IC-CS-03 (Canada); Worldwide PTT approvals Not available in Korea or the Republic of South Africa.
	Health	Bare PCB material compliant to 94V-0 or better (marked as such)
	Other	PC 2001 compliant, PCI version 2.3, WHQL approved; ACPI compliant

Technical Specifications - Graphics

Integrated NVIDIA GeForce 6150SE Graphics	3D/2D Controller	DX9 Graphics Processor
	VGA Controller	Single Display with Integrated DAC
	Bus Type	PCIex16
	RAMDAC	300 MHz RAMDAC
	Memory	Up to 256MB of System Memory
	Controller Clock Speed	Internal 400MHz
	Maximum Color Depth	1920 x 1440
	Maximum Vertical Refresh Rate	75Hz
	Multi-display Support	Yes
	Graphics/Video API Support	Microsoft DirectX9, DirectXVA, OpenGL 1.4

Resolutions Supported[1]

Resolution	Maximum Refresh Rate (Hz)	
	Analog Monitor	Digital Monitor
800 x 600	75	60
1024 x 768	75	60
1280 x 1024	75	60
1600 x 1200	75	60
1920 x 1080	75	60
1920 x 1200	75	60
1920 x 1440	75	60
2048 x 1536		60

[1]Modes listed are supported with a single active display. The supported mode list for multiple active displays is a subset of this list. Not all modes will support video playback and some supported modes may use software MC (motion compensation) rather than hardware MC. Not all modes will support 3D acceleration depending on the system configuration (e.g., resolution selected, size of frame buffer, number of installed memory modules, etc.).

NOTE: Other resolutions and refresh rates may be selectable but are not recommended.

NVIDIA GeForce 8400 GS (256 MB SH) PCIe x16 Graphics Controller	Bus type	PCI Express (x16 lanes)
	Maximum vertical refresh rate	85 Hz
	Display support	Integrated 400 MHz RAMDAC
	Display max resolution	2048 x 1536 (analog), 2560 x 1600 (digital)
	Input/Output connectors	DVI-I (DVI port supports dual-link and HDCP) TV-out (4 pin S-video)
	Board display options	DVI-I + TV DVI-I supports analog CRT or flat panel or digital flat panel (using DVI-A, DVI-D or DVI-I connector) DVI-I supports analog CRT or flat panel (with VGA connector and DVI-I to VGA dongle) TV connector is a 4-pin mini-DIN S-video connector

Technical Specifications - Graphics

Board configuration	Specification	Description
	Graphics Chip	NVIDIA GeForce 8400 GS
	Core clock	460 MHz
	Memory clock	200 MHz
	Frame buffer	256 MB DDR2
Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	
Core power	25 W (Max board power)	

NVIDIA GeForce 8400 GS (256 MB SH) PCIe x16 Graphics Controller display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP.

Analog Resolution	Maximum Refresh Rate
640 x 480	85 Hz
800 x 600	85 Hz
1024 x 768	85 Hz
1280 x 1024	85 Hz
1600 x 1200	85 Hz
1920 x 1080	85 Hz
1920 x 1200	85 Hz
1920 x 1440	85 Hz
2048 x 1536	85 Hz
Digital Resolution	**Maximum Refresh Rate**
640 x 480	60 Hz
800 x 600	60 Hz
1024 x 768	60 Hz
1280 x 1024	60 Hz
1600 x 1200	60 Hz
1920 x 1200*	60 Hz
1920 x 1440**	60 Hz
2560 x 1600**	60 Hz

* Reduced blanking timings used when connected to a single-link DVI monitor
** Requires a dual-link DVI capable monitor

ATI Radeon HD 2400XT (256MB DH) PCIe Graphics Card	Bus type	PCI Express (x16 lanes)
	Maximum vertical refresh rate	85 Hz
	Display support	Integrated 400 MHz RAMDAC
	Display max resolution	2560 x 1600 digital, 2048 x 1536 analog
	Board display options	Supports two displays via included DMS-59 to dual VGA cable or 2 DVI monitors via optional DMS-59 to dual DVI cable kit part number: DL139A. 4-pin mini-DIN S-video connector for TV output

Technical Specifications - Graphics

Board configuration	Specification	Description
	Graphics Chip	RV610
	Core clock	650 MHz
	Memory clock	500 MHz
	Frame buffer	256 MB DDR2, 128 bit wide
Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	
Core power	21 W	
Compliance standards	EMC Emissions: a) FCC Part 15, Subpart B – Unintentional Radiators, Class B Computing Devices for Home & Office Use b) CISPR22: 1997/EN 55022:1998 – Class B – Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment c) Canadian Standard ICES-003 is equivalent to CISPR22 d) Taiwanese Standard BSMI e) Japanese VCCI f) Australian C-Tick g) Korean (MIC) EMC Immunity: CISPR 24:1997/EN 55024:1998 – Information Technology Equipment – Immunity Characteristics – Limits and Methods of Measurement.	

ATI Radeon HD 2400XT (256MB DH) PCIe Graphics Card display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as the may not have been tested and qualified by HP

Analog Resolution	Maximum Refresh Rate
640 x 480	85 Hz
800 x 600	85 Hz
1024 x 768	85 Hz
1280 x 768	85 Hz
1280 x 1024	85 Hz
1600 x 1024	85 Hz
1600 x 1200	85 Hz
1920 x 1080	85 Hz
1920 x 1200	75 Hz
1920 x 1440	85 Hz
2048 x 1536	75 Hz
Digital Resolution	**Maximum Refresh Rate**
640 x 480	60 Hz
800 x 600	60 Hz
1024 x 768	60 Hz
1280 x 768	60 Hz

1280 x 1024	60 Hz
1600 x 1024	60 Hz
1600 x 1200	60 Hz
1920 x 1200	60 Hz

HP PS/2 or USB Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
		Weight	2 lb (0.9 kg) minimum
	Electrical	Operating voltage	+ 5VDC ± 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		ESD	CE level 4, 15-kV air discharge
		EMI – RFI	Conforms to FCC rules for a Class B computing device
		MicrosoftPC 99 – 2001	Functionally compliant
	Mechanical	Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
		Microsoft PC 99 - 2001	Mechanically compliant
		Acoustics	43-dBA maximum sound pressure level
	Environmental	Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
		Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

Technical Specifications - Input Devices

HP USB 2-Button Laser	Scroll Wheel	24	
	Maximum Rotation Speed	48 rats/sec	
	Switch Type	wheel	
	Switch Life	Button – 3,000,000 Wheel – 1,000,000 times Tilt switch – 500,000 times	
	Environmental	Operating Temperature	32° to 104° F (0° to 40° C)
		Non-operating Temperature	-4° to 140° F (-20° to 60° C)
		Operating Humidity	10% to 90% (non-condensing at ambient)
		Non-operating Humidity	20% to 80% (non-condensing at ambient)
		Operating Shock	40 g, six surfaces
		Non-operating Shock	80 g, six surfaces
		Operating Vibration	2-g peak acceleration
		Non-operating Vibration	4-g peak acceleration
	Electrical	Operating Voltage	+ 5VDC ± 5%
		Power Consumption	
		MTBF	> 150,000 hrs
		ESD	IEC-61000-4-2 criteria B, Contact discharge: +/- 4kV, Air discharge: +/- 8kV
		EMI-RFI	FCC Class B
		PC98	PC 99 Compliant
	Mechanical	Resolution	800dpi
		Tracking Speed	25 cm/sec
		Acceleration	0.5mm
		Switch Actuation	0.6N (60gf)
		Switch Life	Button – 3,000,000 Wheel – 1,000,000 times Tilt switch – 500,000 times
		Cable Length	1850mm
		PC98-99	PC99 compliant
	Regulatory Approvals	UL60950-1, UL 94, UL 746 (A-E), UL 796 TUV/GS: EN 60950-1, EN 60825-1 FCC Class B, UL 1950, cUL, TUV GS, CE, C-tick, VCCI, BSMI, RRL	

Technical Specifications - Input Devices

HP PS/2 Optical Scroll Mouse	Dimensions (H x L x W)	3.95 x 6.21 x 11.7 cm (1.56 x 2.44 x 4.61 in)	
	Weight	4.44 oz (126 g)	
	Environmental	Operating temperature	-32° to 104°F (0° to 40° C)
		Non-operating temperature	-4° to 140°F (-20° to 60° C)
		Operating humidity	10% to 90% (non condensing at ambient)
		Non-operating humidity	10% to 90% non condensing
		Operating shock	40 g, 6 surfaces
		Non-operating shock	80 g, 6 surfaces
		Operating vibration	2 g peak acceleration
		Non-operating vibration	4 g peak acceleration
		Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
	Electrical	Operating voltage	5 VDC ± 10%
		Power consumption	100mA
		System consumption	PS/2 mini-din connector
		ESD	CE level 4, 15 kV air discharge
		EMI-RFI	Conforms to FCC rules for a Class B computing device
		Microsoft PC99 – 2001	Functionally compliant
	Mechanical	Resolution	400 ± 20% DPI
		Tracking speed	10 in/s (25.4 cm/s) maximum
		Acceleration	100 in/s/s (2.54 m/s/s)
		Switch actuation	61 g nominal peak force
		Switch life	3,000,000 operations (using Hasco modified tester)
		Switch type	Low force micro-switches
		Tracking mechanism life	155 mi (250 km) at average speed of 10 in/s
		Cable length	6 ft (1.8 m)
		Microsoft PC99 – 2001	Mechanically compliant
	Scroll wheel	Width	8 mm
		Diameter	1.01 in (25.6 mm)
		Maximum rotation speed	48 rats/sec
		Switch type	Light force micro-switch
		Switch life	1 million operations
		Mechanical life	Minimum 200,000 revolutions
	Regulatory approvals	Compliant	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC

Technical Specifications - Input Devices

HP USB Optical Scroll Mouse	Dimensions (H x L x W)	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
	Weight	0.27 lb (0.12 kg)
	Cable length	72.8 in (185 cm)

Serial ATA Hard Drives (7200 rpm)	**80 GB**	**Capacity**	80,026,361,856 bytes	
		Height	1 in (2.54 cm)	
		Width	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (3.0 Gb/s)	
		Synchronous Transfer Rate (Maximum)	3.0 Gb/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	2.0 ms
			Average	11 ms
			Full-Stroke	21 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	156,301,488	
		Operating Temperature	32° to 140° F (0° to 60° C)	
	160 GB	**Capacity**	160,041,885,696 bytes	
		Height	1 in (2.54 cm)	
		Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (3.0 Gb/s)	
		Synchronous Transfer Rate (Maximum)	3.0 Gb/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	2.0 ms
			Average	11 ms
			Full-Stroke	21 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	312,581,808	
		Operating Temperature	32° to 140° F (0° to 60° C)	
	250 GB	**Capacity**	250,059,350,016 bytes	
		Height	1 in (2.54 cm)	
		Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (3.0 Gb/s)	
		Synchronous Transfer Rate (Maximum)	3.0 Gb/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	2.0 ms
			Average	11 ms
			Full-Stroke	21 ms

	Rotational Speed	7,200 rpm	
	Logical Blocks	488,397,168	
	Operating Temperature	41° to 131° F (5° to 55° C)	
500 GB	Capacity	500,107,862,016 bytes	
	Height	1 in (2.54 cm)	
	Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
	Interface	Serial ATA (3.0 Gb/s)	
	Synchronous Transfer Rate (Maximum)	3.0 Gb/s	
	Buffer	8 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2.0 ms
		Average	11 ms
		Full-Stroke	21 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications - Optical Storage

SATA DVD-ROM Drive	Height	5.25-inch, half-height, tray-load		
	Orientation	Either horizontal or vertical		
	Interface type	SATA/ATAPI		
	Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)		
	Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)		
	Weight (max)	2.6 lb (1.2 kg)		
	Read speeds	DVD+R/-R/+RW/ -RW/+R DL /-R DL	Up to 8X	
		DVD-ROM	Up to 16X	
		DVD-RAM	Up to 4X	
		CD-ROM, CD-R	Up to 48X	
		CD-RW	Up to 32X	
	Removable Storage - Media Compatibility - DVD-ROM	Media	Read	Write
		CD-ROM	Yes	No
		CD-R	Yes	No
		CD-RW	Yes	No
		DVD-ROM	Yes	No
		DVD-ROM DL	Yes	No
		DVD-RAM	Yes	No
		DVD+R	Yes	No
		DVD+R DL	Yes	No
		DVD+RW	Yes	No
		DVD-R	Yes	No
		DVD-RW	Yes	No
		DVD-R DL	Yes	No
	Access times (typical reads, including setting)	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)	
		Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)	
		Cache Buffer	2 MB (minimum)	
		Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s -default)	
	Power	Source	SATA DC power receptacle	
		DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p	
		DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC -< 600 mA typical, < 1400 mA maximum	

	Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
		Relative Humidity	10% to 90%
		Maximum Wet Bulb Temperature	86° F (30° C)
SATA CD-RW/DVD-ROM Combo Drive	Height		5.25-inch, half-height, tray-load
	Orientation		Either horizontal or vertical
	Interface type		SATA/ATAPI
	Disc capacity		Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)
	Dimensions (W x H x D)		5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)
	Weight (max)		2.6 lb (1.2 kg)
	Write speeds	CD-R	Up to 48X
		CD-RW	Up to 32X
	Read speeds	DVD+R/-R/+RW/ -RW/+R DL /-R DL	Up to 8X
		DVD-ROM	Up to 16X
		CD-ROM, CD-R	Up to 48X
		CD-RW	Up to 32X
	Access times (typical reads, including setting)	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)
		Full Stroke	DVD: < 250 ms (typical), CD: < 210 ms (typical)
	Power	Source	SATA DC power receptacle
		DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
		DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC -< 600 mA typical, < 1400 mA maximum
	Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
		Relative Humidity	10% to 90%
		Maximum Wet Bulb Temperature	86° F (30° C)

Technical Specifications - Optical Storage

HP SATA SuperMulti LightScribe DVD Writer Drive	Height	5.25-inch, half-height, tray-load	
	Orientation	Either horizontal or vertical	
	Interface type	SATA/ATAPI	
	Disc capacity	8.5 GB DL or 4.7 GB standard	
	Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
	Weight (max)	2.6 lb (1.2 kg)	
	Write speeds	DVD-RAM	Up to 12X
		DVD+R	Up to 16X
		DVD+RW	Up to 8X
		DVD+R DL	Up to 8X
		DVD-R DL	Up to 8X
		DVD-R	Up to 16X
		DVD-RW	Up to 6X
		CD-R	Up to 48X
		CD-RW	Up to 32X
	Read speeds	DVD-RAM	Up to 12X
		DVD+R/-R/+RW/ -RW/+R DL /-R DL	Up to 8X
		DVD-ROM DL	Up to 8X
		DVD-ROM, DVD+R, DVD-R	Up to 16X
		CD-ROM, CD-R	Up to 48X
		CD-RW	Up to 32X
	Access times (typical reads, including setting)	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)
		Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)
	Power	Source	SATA DC power receptacle
		DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
		DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC -< 600 mA typical, < 1400 mA maximum
	Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
		Relative Humidity	10% to 90%
		Maximum Wet Bulb Temperature	86° F (30° C)

Technical Specifications - Removable Storage

1.44-MB Diskette Drive	Size	3.5 in (8.89 cm)	
	LED Indicators (front panel)	Green	
	Read/Write Capacity per Diskette (high/low)	1.44 MB/720 KB	
	Drive Height	One-third	
	Drive Rotation	300 rpm	
	Transfer Rate (high/low)	500/250 KB/s	
	Bytes/Sector	512	
	Sectors/Track (high/low)	18/9	
	Tracks/Side (high/low)	80/80	
	Access Times	Track-to-Track (high/low)	3/6 ms
		Average (high/low)	94/173 ms
		Settling Time	15 ms
		Latency Average	100 ms
	Cylinders (high/low)	80/80	
	Read/Write Heads	Two	

HP 16-in-1 Media Card Reader	USB interface	USB 2.0 High-speed device via PCI card or pass -through via internal USB port of system board
	Advance protocol support	• Supports hardware ECC (Error Correction Code) function • Supports hardware CRC (Cyclic Redundancy Check) function • Supports MS 4-bit parallel transfer mode • Supports MS-PRO 4-bit parallel transfer mode • Supports SD 4-bit parallel transfer mode • Supports high-speed 50 MHz SD 4-bit card (version 1.1) • Support high-speed 52 MHz MMC 8-bit card (version 4.x)
	Supported media types	• Supports CompactFlash Card Type I (CF I), CompactFlash Card Type II (CF II),MicroDrive (MD) • Supports 3.3V SmartMedia Card (SM), SmartMedia ROM (SM ROM), xD-Picture Card (xD) • Supports Secure Digital Card (SD), Secure Digital ROM Card (SD ROM), miniSD, MultiMediaCard (MMC), Secure MultiMediaCard (Secure MMC), ROM Type MultiMediaCard (MMC ROM), Reduced Size MultiMediaCard (RS MMC), MultiMediaCard 4.0 (MMC Plus), Reduced Size MultiMediaCard 4.0 (MMC Mobile) • Support Memory Stick (MS), Memory Stick ROM (MS ROM), MagicGate Memory Stick (MG), Memory Stick Select, Memory Stick Duo (MS Duo), Memory Stick PRO (MS-PRO), Memory Stick PRO Duo (MS PRO Duo)
	Mechanical	Length (3.5") 124.7 cm Width (3.5") 101.6 cm Height (3.5") 25.4 cm Length (5.25") 171.6 cm Width (5.25") 148.9 cm

	Height (5.25")	42.7 cm
Environmental	Operational environmental extremes	Test Parameters/Conditions – Power applied, unit operating on system ±5% nominal supply voltage. 10°C 10% R.H. = 24 hours 10°C 90% R.H. = 24 hours 20°C 90% R.H. = 24 hours 30°C 90% R.H. = 24 hours 40°C 90% R.H. = 24 hours 50°C 90% R.H. = 24 hours 50°C 10% R.H. = 24 hours
	Storage environmental extremes	Test Parameters/Conditions 60°C @ 80% R.H. for 96 hours -30°C @ 20% R.H. for 48 hours No power applied Delta °C < 1.0°C/min Delta % R.H. < 1.5% R.H./min
Approvals		USB-IF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0, Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.2 FCC, CE, BSMI, C-Tick, VCCI, MIC, cUL, TUV-T

Eco-Label Certifications & declarations	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:
Hewlett-Packard Corporate Environmental Information	For more information about HP's commitment to the environment: Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html

© Copyright 2008 Hewlett-Packard Development Company, L.P.

All rights reserved.

The information contained herein is subject to change without notice.

Intel and Pentium are U.S. registered trademarks of Intel Corporation. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.